

HE-VA Kult-Dan

Versatile lift-mounted seedbed harrow



... for all types of soil



**HE-VA**
HARROWS

Kulti-Dan

- Simple and effective cultivating on all types of soil



Kulti-Dan is a flexible lift-mounted seedbed harrow that with the wide range of extra equipment can be adapted for any farm, soil type and tractor. The large depth wheels carry the harrow on light soil, while a high weight ensures a correct harrow depth on even the heaviest soil.

Harrow tines

The Kulti-Dan has 10 x 32 mm tines mounted on 4 rows with a row distance of 40 cm. The average row spacing is 10 cm (optionally 8 cm).

The angle of tines can quickly and easily be adjusted in 4 different positions by using the adjusting handle, depending on the soil type and the harrow duty.



The large wheels -

6.00 x 12 ensure the depth accuracy to be most exact. The wheels are spindle-adjusted and equipped with a depth setting scale. Adjustable wheel scrapers guarantee an unproblematic operation.



Automatic transport lock


- secures the side sections, on models with hydraulic folding.



DRAWBAR / EXTRA EQUIPMENT

Flexible drawbar

- makes the harrow semi-mounted at the same time as the advantages of the lift-mounted harrow are kept. Un- and decoupling is performed from the tractor seat by means of a rope.

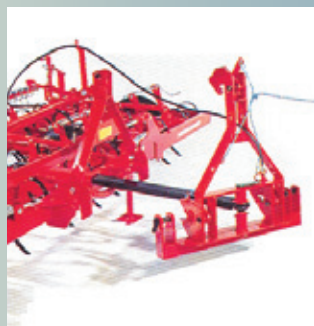

Pivot flex drawbar

- spares and relieves the pressure on the tractor's three point linkage. Moreover it is possible to make small turns without lifting the harrow. Can be used for Kulti-Dan models from 2.20 m and up to 5.20 m.



HE-VA's range of extra equipment

- ensures an optimal setup of Kulti-Dan for any farm and type of soil

LEVELLING BAR

The spring-loaded levelling bar is highly effective for levelling the field and breaking the clods before the soil is being cultivated. The setting is done easily by using the adjusting handle - no tools are required. The strong springs protect the levelling bar against overload when hitting stones.



LONG FINGER AFTER-HARROW

The long finger after harrow levels the tine tracks effectively. Both the depth and angle adjustment can easily be changed on the after-harrow so that the required operation intensity can be achieved.



COMBI-AFTER-HARROW

The combi-after-harrow is a combination of a long finger after-harrow and a rotor crumbler. This combi-after-harrow guarantees a uniform, perfect and even seedbed on medium-heavy soil, as it levels and presses the soil simultaneously.



ROTOR CRUMBLER



DOUBLE ROTOR CRUMBLER




The rotor crumbler / double rotor crumbler press the cultivated soil so that the moisture is preserved and larger clods are broken. The pressure on the crumblers are adjusted with the leaf springs.

**HE-VA**
HARROWS

STANDARD EQUIPMENT:

- Harrow with 4 rows of 10 x 32 mm tines
- Adjustable tine angle
- Quick coupling
- Depth control (wheel 6.00 x 12)
- Hydraulic folding with automatic transport lock from 4.60 m harrows

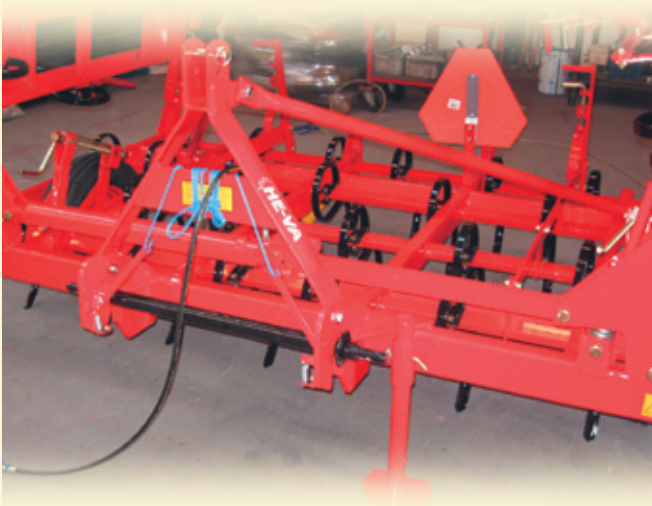

Kulti-Dan is equipped with quick coupling, making connection and disconnection very easy. Notice the support stand which makes it easy to park the harrow.

EXTRA EQUIPMENT:

- 12 x 32 mm tines
- Levelling bar
- Long finger after-harrow
- Combi-after-harrow
- Rotor crumbler
- Double rotor crumbler
- Flexible drawbar
- Pivot flex drawbar for up to 5,20 m
- 8 cm tine spacing
- Hydraulic folding for 3.40 & 4.00 m



During transport the side sections are folded over into vertical position in order to make the harrow as narrow as possible. The transport width is always below 3.00 m.

TECHNICAL SPECIFICATIONS:

| Working width m | Transport width m | Number of tines per section | Weight without extra equipment kg | Weight levelling bar kg | Weight long finger after-harrow kg | Weight combi-after-harrow kg | Weight rotor crumbler kg | Weight double rotor crumbler kg | Power required approx. DIN-HK |
|-----------------|-------------------|-----------------------------|-----------------------------------|-------------------------|------------------------------------|------------------------------|--------------------------|---------------------------------|-------------------------------|
| 2,20 | 2,20 | 22 | 370 | 41 | 49 | 160 | 135 | 195 | 25-35 |
| 2,80 | 2,80 | 28 | 423 | 47 | 64 | 189 | 158 | 231 | 35-45 |
| 3,40 | 2,40 | 6+22+6 | 556 | 73 | 94 | 275 | 235 | 328 | 45-55 |
| 4,00 | 3,00 | 6+28+6 | 609 | 79 | 109 | 304 | 258 | 362 | 50-60 |
| 4,60 | 2,40 | 12+22+12 | 761 | 83 | 108 | 321 | 271 | 388 | 60-75 |
| 5,20 | 3,00 | 12+28+12 | 819 | 89 | 123 | 350 | 294 | 415 | 70-90 |
| 5,80 | 2,40 | 18+22+18 | 897 | 115 | 138 | 380 | 318 | 450 | 80-90 |
| 6,40 | 3,00 | 18+28+18 | 955 | 121 | 153 | 409 | 341 | 490 | 80-100 |



N. A. Christensensvej 34
DK-7900 Nykøbing Mors
Tel: +45 9772 4288
Fax: +45 9772 2112

Email: info@he-va.com
Web: www.he-va.com

YOUR LOCAL HE-VA DEALER

Due to our policy of continual improvement we reserve the right to change specifications without notice. E & O. E.