

# Technical Specifications



3.00 - 7.00 m



2.48 - 4.00 m



21 - 50 pcs



1,360 - 2,560 kg



70 - 260 hp

Working Width, m	Type	Transport Width, m	Number of Tines	Power Requirements, hp	Lifting Requirements, kg	Weight, kg
3.00	Rigid	3.00	21	70 - 120	2,450	1,360
3.50	Rigid	3.50	25	80 - 150	2,650	1,470
4.00	Rigid	4.00	29	90 - 180	2,850	1,580
4.00	Hydraulic, 2-section	2.48	29	90 - 180	4,020	2,230
5.00	Hydraulic, 2-section	2.48	36	110 - 220	4,220	2,340
6.00	Hydraulic, 2-section	2.48	43	130 - 240	4,410	2,450
7.00	Hydraulic, 2-section	2.48	50	150 - 260	4,550	2,560



## Penta-Tiller

The ideal harrow for false seedbeds and weed control in stubble



Tel.: +45 97 72 42 88  
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensevej 34  
DK-7900 Nykøbing Mors

Your HE-VA dealer



HE-VA reserves the right to make design and construction changes without notice



# The versatile harrow that adapts to the needs and wishes of the farmer...

HE-VA's Penta-Tiller is an ideal harrow for mechanical weed control, and a versatile one at that.

The 5-bar harrow has a frame height of 570 mm, which ensures good passage. This prevents residues etc. from sticking.


The Penta-Tiller is supplied with 70x12 mm tines, with the option of purchasing an auxiliary spring.

In addition, it is possible to have the Penta-Tiller delivered with a free choice between two types of points, depending on the farmer's needs and wishes.

- The two options:
- Wingshare for full cutting
  - Standard wear point for the deeper machining.

If the need for the other point arises, these can subsequently (or at the same time) be purchased as extra equipment, giving the farmer the opportunity to change points. This gives the farmer two harrows in one.

A multitude of extra equipment can be purchased for the Penta-Tiller, which makes it possible to adapt the machine to the given conditions.

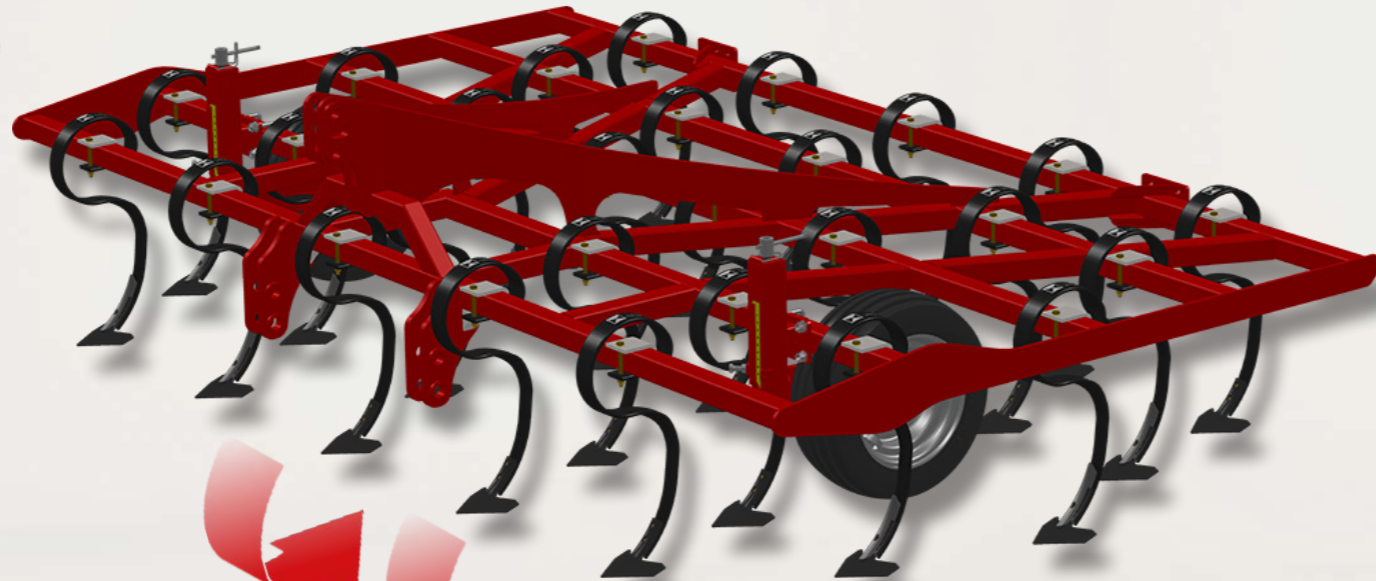

**OPTIMAL  
PASSAGE**



**DEPTH CONTROL  
VIA DEPTH WHEEL**



## Options

Depending on the need, the Penta-Tiller can be supplied with either 180 mm goosefoot points or 52 mm reversible wear points.



If a full cut is required in an upper tillage operation, HE-VA recommends a 180 mm goosefoot point.



However, if deeper processing of the soil is required, a 52 mm reversible wear point is recommended as standard.

## Extra Equipment

### LED Lights

LED lighting can be purchased for all models.



### Auxiliary Spring


The auxiliary spring acts as a reinforcement for the 70x12 mm tine and is mainly used in extreme soil conditions and for slightly deeper tillage.



### Longfinger Afterharrow

A long finger harrow with either single or double tines can be purchased as an accessory.

In addition, long finger harrows can be purchased as a single row in combination with a roller.

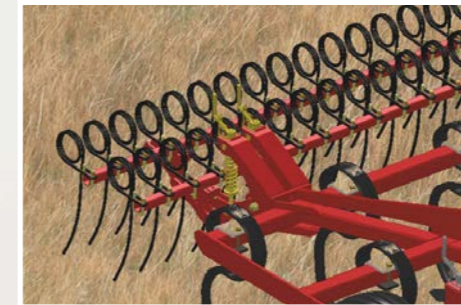

### Top-Cutter

The HE-VA Penta-Tiller can be equipped with a Top-Cutter module with single knife roller.


It is mounted between tractor and harrow and the aggressiveness is adjusted manually via spindles.



### Spring-Board

Penta-Tiller can also be equipped with a Spring-Board.

Is mounted between tractor and harrow and the aggressiveness is adjusted manually via spindles.

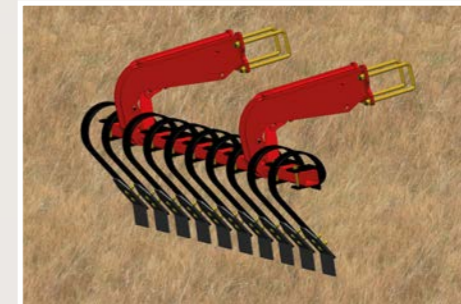


### Mounting Set for Multi-Seeder

A mounting bracket is offered for the HE-VA Multi-Seeder for rapeseed, grass seed and other small seeds, fertilizer or slug poison.



### Tube Roller

Tube Roller Ø550 mm.

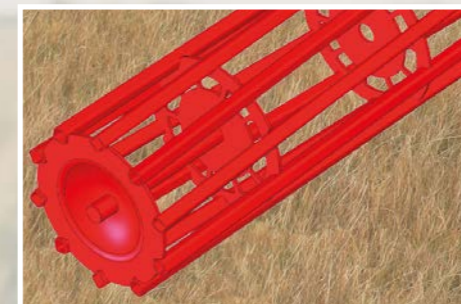

### Flat Bar Roller

Flat Bar Roller Ø410 mm.

