


STEALTH (THREE-POINT MOUNTED)



- 470 mm serrated discs - hydraulically operated.
- Tine distance can be adjusted to between 450 and 550 mm.
- Hydraulic depth control.
- 700 mm frame height.
- Work depth max. 300 mm.
- 2.50 - 4.00 m: Three-point linkage with category 3 pins and category 2 distance.
- 4.00 - 6.00 m: Three-point linkage with category 3 pins and category 3 distance.

MACHINES

								
					Synchrone Roller 300/55	V-Profile Roller Ø600 mm	Star Roller Ø450/Ø500 mm	
Work Width, m	Type	Stone Protection	No. of Tines	Weight, kg	Item Number	Item Number	Item Number	
3.00	Rigid	Quick-Push	1*	5	1,500 - 2,050	64483-20	64480-20	64482-20
3.00	Rigid	Quick-Push	1*	6	1,500 - 2,050	64483-21	64480-21	64482-21
3.00	Rigid	Hydraulic	1*	5	1,500 - 2,050	64483-25	64480-25	64482-25
3.00	Rigid	Hydraulic	1*	6	1,500 - 2,050	64483-26	64480-26	64482-26
3.50	Rigid	Quick-Push	1*	6	2,000 - 2,370	64483-30	64480-30	64482-30
3.50	Rigid	Quick-Push	1*	7	2,000 - 2,370	64483-31	64480-31	64482-31
3.50	Rigid	Quick-Push	1*	8	2,000 - 2,370	64483-32	64480-32	64482-32
3.50	Rigid	Hydraulic	1*	6	2,000 - 2,370	64483-35	64480-35	64482-35
3.50	Rigid	Hydraulic	1*	7	2,000 - 2,370	64483-36	64480-36	64482-36
3.50	Rigid	Hydraulic	1*	8	2,000 - 2,370	64483-37	64480-37	64482-37
4.00	Rigid	Quick-Push	1*	7	2,450 - 2,950	64483-70	64480-70	64482-70
4.00	Rigid	Quick-Push	1*	8	2,450 - 2,950	64483-71	64480-71	64482-71
4.00	Rigid	Quick-Push	1*	9	2,450 - 2,950	64483-72	64480-72	64482-72
4.00	Rigid	Hydraulic	1*	7	2,450 - 2,950	64483-75	64480-75	64482-75
4.00	Rigid	Hydraulic	1*	8	2,450 - 2,950	64483-76	64480-76	64482-76
4.00	Rigid	Hydraulic	1*	9	2,450 - 2,950	64483-77	64480-77	64482-77
4.00	Foldable	Quick-Push	2*	7	2,890 - 3,670	64483-40	64480-40	64482-40
4.00	Foldable	Quick-Push	2*	8	2,890 - 3,670	64483-41	64480-41	64482-41
4.00	Foldable	Quick-Push	2*	9	2,890 - 3,670	64483-42	64480-42	64482-42
4.00	Foldable	Hydraulic	2*	7	2,890 - 3,670	64483-45	64480-45	64482-45
4.00	Foldable	Hydraulic	2*	8	2,890 - 3,670	64483-46	64480-46	64482-46
4.00	Foldable	Hydraulic	2*	9	2,890 - 3,670	64483-47	64480-47	64482-47
5.00	Foldable	Quick-Push	2*	9	3,700 - 4,600	64483-50	64480-50	64482-50
5.00	Foldable	Quick-Push	2*	10	3,700 - 4,600	64483-51	64480-51	64482-51
5.00	Foldable	Quick-Push	2*	11	3,700 - 4,600	64483-52	64480-52	64482-52
5.00	Foldable	Hydraulic	2*	9	3,700 - 4,600	64483-55	64480-55	64482-55
5.00	Foldable	Hydraulic	2*	10	3,700 - 4,600	64483-56	64480-56	64482-56
5.00	Foldable	Hydraulic	2*	11	3,700 - 4,600	64483-57	64480-57	64482-57
6.00	Foldable	Quick-Push	2*	11	4,700 - 5,600	64483-60	64480-60	64482-60
6.00	Foldable	Quick-Push	2*	12	4,700 - 5,600	64483-61	64480-61	64482-61
6.00	Foldable	Quick-Push	2*	13	4,700 - 5,600	64483-62	64480-62	64482-62
6.00	Foldable	Hydraulic	2*	11	4,700 - 5,600	64483-65	64480-65	64482-65
6.00	Foldable	Hydraulic	2*	12	4,700 - 5,600	64483-66	64480-66	64482-66
6.00	Foldable	Hydraulic	2*	13	4,700 - 5,600	64483-67	64480-67	64482-67

^{1*}Requires 1 double-acting oil outlet

^{2*}Requires 2 double-acting oil outlets

STANDARD EQUIPMENT

- 470 mm serrated discs - hydraulically operated.
- Stealth tines - 15 mm thick Hardox® 500 tines.
- Easy-Draft hard metal points with 120 mm wide wings.
- 2 rows of tines – tine extension of 350 mm.

EXTRA EQUIPMENT

Description	Weight, kg	Item Number
LED lights w/wire and socket for 1-section models	3	64509-01
LED lights w/wire and socket for models with hydraulic folding	3	64485-96
LED lights complete w/wire and socket, for hydraulic models with mounting set for Multi-Seeder (provided that the machine is mounted with a mounting set for Multi-Seeder)	3	64485-97
Set of reflective warning boards (2 pieces)	8	67055-74
Tine for retrofitting incl. discs, Quick-Push stone protection, complete When ordering, state serial no	80	64484-00
Tine for retrofitting incl. discs, hydraulic stone protection, complete When ordering, state serial no	125	64484-01
120 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	-	645000056TA
200 mm wear point for Easy-Draft, with hard metal plate in center (Additional price per tine)	-	645000054A
200 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	-	645000054TA
Tine reinforcement, hard metal 60x15x15 mm incl. factory-mounting on new tine. Only applied for Easy-Draft (Additional price per tine)	-	645000083




STEALTH (TRAILED)



- 470 mm serrated discs - hydraulically operated.
- Tine distance can be adjusted to between 450 and 550 mm.
- Hydraulic depth control.
- 700 mm frame height.
- Work depth max. 300 mm.

MACHINES

Work Width, m	Type	Stone Protection	No. of Tines	  		
				Synchrone Roller 300/55 Item Number	V-Profile Roller Ø600 mm Item Number	Star Roller Ø450/Ø500 mm Item Number
4.00	Foldable	Quick-Push	^{1*} 7	64483-80	64480-80	64482-80
4.00	Foldable	Quick-Push	^{1*} 8	64483-81	64480-81	64482-81
4.00	Foldable	Quick-Push	^{1*} 9	64483-82	64480-82	64482-82
4.00	Foldable	Hydraulic auto release	^{1*} 7	64483-85	64480-85	64482-85
4.00	Foldable	Hydraulic auto release	^{1*} 8	64483-86	64480-86	64482-86
4.00	Foldable	Hydraulic auto release	^{1*} 9	64483-87	64480-87	64482-87
5.00	Foldable	Quick-Push	^{1*} 9	64483-90	64480-90	64482-90
5.00	Foldable	Quick-Push	^{1*} 10	64483-91	64480-91	64482-91
5.00	Foldable	Quick-Push	^{1*} 11	64483-92	64480-92	64482-92
5.00	Foldable	Hydraulic auto release	^{1*} 9	64483-95	64480-95	64482-95
5.00	Foldable	Hydraulic auto release	^{1*} 10	64483-96	64480-96	64482-96
5.00	Foldable	Hydraulic auto release	^{1*} 11	64483-97	64480-97	64482-97
6.00	Foldable	Quick-Push	^{1*} 11	64483-00	64480-00	64482-00
6.00	Foldable	Quick-Push	^{1*} 12	64483-01	64480-01	64482-01
6.00	Foldable	Quick-Push	^{1*} 13	64483-02	64480-02	64482-02
6.00	Foldable	Hydraulic auto release	^{1*} 11	64483-05	64480-05	64482-05
6.00	Foldable	Hydraulic auto release	^{1*} 12	64483-06	64480-06	64482-06
6.00	Foldable	Hydraulic auto release	^{1*} 13	64483-07	64480-07	64482-07

^{1*}Requires 2 double-acting oil outlets

STANDARD EQUIPMENT

- 470 mm serrated discs - hydraulically operated.
- Stealth tines - 15 mm thick Hardox® 500 tines.
- Easy-Draft hard metal points with 120 mm wide wings.
- 2 rows of tines – tine extension of 350 mm.
- Wheels: 500/50x17.00 18 PLY
- Ball joint towing eye :
 - 4.00 - 6.00 m: Cat 4 Ø51 mm, item no.: 630757112.

EXTRA EQUIPMENT

Description	Weight, kg	Item Number
LED lights with wire and socket	-	3401951
Tine for retrofitting incl. discs, Quick-Push stone protection, complete When ordering, state serial no	80	64484-00
Tine for retrofitting incl. discs, hydraulic stone protection, complete. When ordering, state serial no	125	64484-01
120 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	-	645000056TA
200 mm wear point for Easy-Draft, with hard metal plate in center (Additional price per tine)	-	645000054A
200 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	-	645000054TA
Tine reinforcement, hard metal 60x15x15 mm incl. factory-mounting on new tine. Only applied for Easy-Draft (Additional price per tine)	-	645000083
Air brakes	18	63093-96
Hydraulic brakes, 1-circuit	7	63093-94
Hydraulic brakes, 2-circuit, factory-mounted	-	63093-95

TILL SEEDING - STEALTH



RAPE EQUIPMENT - STEALTH

Mounting set for Multi-Seeder, incl. mounting on a new Stealth.

One special dosing roll for rape/fertilizer is included in the price.


One of the following seeding methods is to be chosen as well as one of the Multi-Seeder models.



Band seeding
before the packer
roller



Seeding with disc
coulters with 75 mm
wide depth/press wheel.
1 row placed in centre
line of the tine, after
packer roller.

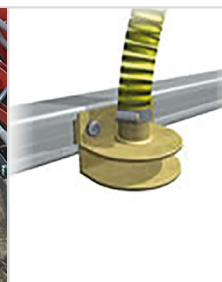

Wide sowing before
packer roller

Work Width, m	Type	Description	No. of Tines	Item Number	Item Number	Item Number
THREE-POINT MOUNTED						
3.00	Rigid	Multi-Seeder without Auto-Controller	6	64485-01	64485-31	64485-61
3.00	Rigid	Multi-Seeder with Auto-Controller	^{1*} 6	64485-02	64485-32	64485-62
3.50	Rigid	Multi-Seeder without Auto-Controller	7	64485-05	64485-35	64485-65
3.50	Rigid	Multi-Seeder with Auto-Controller	^{1*} 7	64485-06	64485-36	64485-66
4.00	Rigid	Multi-Seeder without Auto-Controller	8	64485-09	64485-39	64485-69
4.00	Rigid	Multi-Seeder with Auto-Controller	^{1*} 8	64485-10	64485-40	64485-70
4.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 8	64485-13	64485-43	64485-73
5.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 10	64485-17	64485-47	64485-77
6.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 12	64485-21	64485-51	64485-81
TRAILED						
4.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 8	64485-15	-	64485-75
5.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 10	64485-19	-	64485-79
6.00	Foldable	Multi-Seeder with Auto-Controller	^{1*} 12	64485-23	-	64485-83
-	Rigid	Platform w/steps. Recommended 2, when mounting fertilizer tank. (Price per unit)	-	64485-95	64485-95	64485-95
	Foldable	Platform with steps	-	63099-50	63099-50	63099-50
50 mm narrow depth-press wheel, suitable for clay soil and sticky soil types (not suitable for lighter soil types).			^{2*} -	0516898	0516898	0516898

^{1*}If multiple Multi-Seeders are mounted with Auto-Controller, up to 3 Multi-Seeders are operated from the same monitor in the cabin (not Front-Tank).

^{2*}Same price but item number must be used.





SLUG POISON EQUIPMENT - STEALTH

Mounting set for Multi-Seeder, model TWIN or an extra Multi-Seeder, incl. mounting on a new Stealth.

One special dosing roll for slug poison is included in the price.

One of the following solutions is to be chosen as well as one of the Multi-Seeder models.

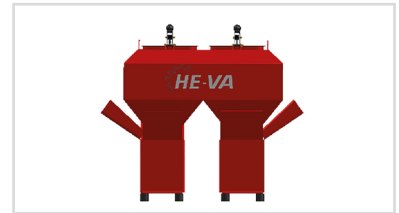

PLACEMENT OF SLUG POISON IN BANDS AFTER THE ROLLER OR DEPTH WHEEL.				
Work Width, m	Type	Placement	No. of Tines	Item Number
THREE-POINT MOUNTED				
3.00	Rigid	Band after roller	6	64486-01
3.50	Rigid	Band after roller	7	64486-05
4.00	Rigid	Band after roller	8	64486-09
4.00	Foldable	Band after roller	8	64486-13
5.00	Foldable	Band after roller	10	64486-17
6.00	Foldable	Band after roller	12	64486-21
3.00	Rigid	Band after depth wheel	6	64486-02
3.50	Rigid	Band after depth wheel	7	64486-06
4.00	Rigid	Band after depth wheel	8	64486-10
4.00	Foldable	Band after depth wheel	8	64486-14
5.00	Foldable	Band after depth wheel	10	64486-18
6.00	Foldable	Band after depth wheel	12	64486-22
TRAILED				
4.00	Foldable	Band after roller	8	64486-15
5.00	Foldable	Band after roller	10	64486-19
6.00	Foldable	Band after roller	12	64486-23
4.00	Foldable	Band after depth wheel	8	64486-16
5.00	Foldable	Band after depth wheel	10	64486-20
6.00	Foldable	Band after depth wheel	12	64486-24

**If multiple Multi-Seeders are mounted with Auto-Controller, up to 3 Multi-Seeders are operated from the same monitor in the cabin (not Front-Tank).*

FERTILIZER EQUIPMENT - STEALTH

Mounting set for Multi-Seeder and Front-Tank, incl. mounting on a new Stealth.

Please choose one of the following solutions alongside a Multi-Seeder model or Front-Tank.



Multi-Seeder



Front-Tank

FERTILIZER EQUIPMENT PLACES THE FERTILIZER JUST AFTER THE TINE FOR MIXING IN 2-10 CM				
Work Width, m	Type	Description	No. of Tines	Item Number
THREE-POINT MOUNTED				
3.00	Rigid	Front-Tank	6	64486-40
3.00	Rigid	Multi-Seeder without Auto-Controller	2* 6	64486-60
3.00	Rigid	Multi-Seeder with Auto-Controller	1*/2* 6	64486-70
3.50	Rigid	Front-Tank	7	64486-41
3.50	Rigid	Multi-Seeder without Auto-Controller	2* 7	64486-61
3.50	Rigid	Multi-Seeder with Auto-Controller	1*/2* 7	64486-71
4.00	Rigid	Front-Tank	8	64486-42
4.00	Rigid	Multi-Seeder with Auto-Controller	1*/2* 8	64486-72
4.00	Foldable	Front-Tank	8	64486-43
5.00	Foldable	Front-Tank	10	64486-45
6.00	Foldable	Front-Tank	12	64486-47
TRAILED				
4.00	Foldable	Front-Tank	8	64486-44
5.00	Foldable	Front-Tank	10	64486-46
6.00	Foldable	Front-Tank	12	64486-48

¹If multiple Multi-Seeders are mounted with Auto-Controller, up to 3 Multi-Seeders are operated from the same monitor in the cabin (not Front-Tank).

²The hydraulic fan is equipped with air distributor with 2 or 3 outlets and will also supply the Multi-Seeders with air.