

# WEEDER HD



- Double slotted bars for quick mounting of 7 mm or 9 mm tines.
- Stronger bar tubes.
- Free floating sections – optimum soil adaptation.
- Quick dismounting and mounting of tines without any tools.
- Many tine combinations.
- Adjustable tine aggressiveness in 5 different angles.
- Wide carrying wheels, height adjustable on spindles.
- Three-point linkage with category 2 pins and category 2 distance.

## MACHINES

Work Width, m	Type	Description	No. of Tines/Points	No. of Sections	No. of Wheels	Height Folded	Power Req., HP	Lifting Req., kg	Weight, kg	Item Number
3.00	Rigid	7 x 600 mm tines	60/120	2	2	1.10	40	750	530	4810003
4.50	Foldable	7 x 600 mm tines	<sup>1*</sup> 90/180	3	2	2.00	50	825	620	4810004
6.00	Foldable	7 x 600 mm tines	<sup>1*/3*</sup> 120/240	4	2	2.95	60	975	720	4811000
7.50	Foldable	7 x 600 mm tines	<sup>1*</sup> 150/300	5	4	3.40	70	1,200	890	4812000
9.00	Foldable	7 x 600 mm tines	<sup>1*/4*</sup> 180/360	6	4	3.70	80	1,650	1,210	4813000
9.00	Foldable	LOW - 7 x 600 mm tines	<sup>1*</sup> 180/360	6	4	3.35	80	1,650	1,290	4813001
12.00	Foldable	7 x 600 mm tines	<sup>2*</sup> 240/480	8	4	3.35	110	2,250	1,630	4815000
15.00	Foldable	7 x 600 mm tines	<sup>2*</sup> 300/600	10	6	4.25	130	2,850	2,030	4817000
3.00	Rigid	9 x 600 mm tines	60/120	2	2	1.10	40	750	530	4810013
4.50	Foldable	9 x 600 mm tines	<sup>1*</sup> 90/180	3	2	2.00	50	825	620	4810014
6.00	Foldable	9 x 600 mm tines	<sup>1*/3*</sup> 120/240	4	2	2.95	60	975	720	4811010
7.50	Foldable	9 x 600 mm tines	<sup>1*</sup> 150/300	5	4	3.40	70	1,200	890	4812010
9.00	Foldable	9 x 600 mm tines	<sup>1*/4*</sup> 180/360	6	4	3.70	80	1,650	1,210	4813010
9.00	Foldable	LOW - 9 x 600 mm tines	<sup>1*</sup> 180/360	6	4	3.35	80	1,650	1,290	4813011
12.00	Foldable	9 x 600 mm tines	<sup>2*</sup> 240/480	8	4	3.35	110	2,250	1,630	4815010
15.00	Foldable	9 x 600 mm tines	<sup>2*</sup> 300/600	10	6	4.25	130	2,850	2,030	4817010
3.00	Rigid	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	60/120	2	2	1.10	40	750	530	4810023
4.50	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>1*</sup> 90/180	3	2	2.00	50	825	620	4810024
6.00	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>1*/3*</sup> 120/240	4	2	2.95	60	975	720	4811020
7.50	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>1*</sup> 150/300	5	4	3.40	70	1,200	890	4812020
9.00	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>1*/4*</sup> 180/360	6	4	3.70	80	1,650	1,210	4813020
9.00	Foldable	LOW - 9x600 mm on 2 front rows. 7x600 mm on 3 rear rows.	<sup>1*</sup> 180/360	6	4	3.35	80	1,650	1,290	4813021
12.00	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>2*</sup> 240/480	8	4	3.35	110	2,250	1,630	4815020
15.00	Foldable	9 x 600 mm on 2 front rows. 7 x 600 mm on 3 rear rows.	<sup>2*</sup> 300/600	10	6	4.25	130	2,850	2,030	4817020
3.00	Rigid	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	60/120	2	2	1.10	40	750	530	4810033
4.50	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>1*</sup> 90/180	3	2	2.00	50	825	620	4810034
6.00	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>1*/3*</sup> 120/240	4	2	2.95	60	975	720	4811030
7.50	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>1*</sup> 150/300	5	4	3.40	70	1,200	890	4812030
9.00	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>1*/4*</sup> 180/360	6	4	3.70	80	1,650	1,210	4813030
9.00	Foldable	LOW - 9 x 600 mm tines mounted 7 x 600 mm tines supplied.	<sup>1*</sup> 180/360	6	4	3.35	80	1,650	1,290	4813031
12.00	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>2*</sup> 240/480	8	4	3.35	110	2,250	1,630	4815030
15.00	Foldable	9 x 600 mm tines mounted. 7 x 600 mm tines supplied.	<sup>2*</sup> 300/600	10	6	4.25	130	2,850	2,030	4817030

<sup>1\*</sup>Requires 1 double-acting oil outlet.

<sup>3\*</sup>Height folded: 2.50 m with sections in transport position.

<sup>\*</sup>Transport width for all models is 3.00 m / Row Spacing: 2.50 cm 5 rows / Weight given with mounting of 9 mm tines


<sup>2\*</sup>Requires 2 double-acting oil outlets.

<sup>4\*</sup>Height folded with levelling board: 4.35 m

## STANDARD EQUIPMENT

- Weeder sections with optional double tines mounted with pins.
- 7 x 450 mm double tines can be chosen at no extra cost. Order per number of sections.
- 9 x 450 mm double tines can be chosen at no extra cost. Order per number of sections.
- Carrying wheel:
  - 3.00 m: 2 pcs. 16x6.5x8 – 6 PLY.
  - 4.50 m and 6.00 m: 2 pcs. 18.5x8.5x8 – 6 PLY.
  - 7.50 m and 9.00 m: 2 pcs. 18.5x8.5x8 – 6 PLY and 2 pcs. 16x6.5x8 – 6 PLY.
  - 12.00 m: 4 pcs. 18.5x8.5x8 – 6 PLY.
  - 15.00 m: 2 pcs. 20x8.00-10 and 4 pcs. 18.5x8.5x8 - 6 PLY.
- Support stand, pins and locking pins.

## EXTRA EQUIPMENT

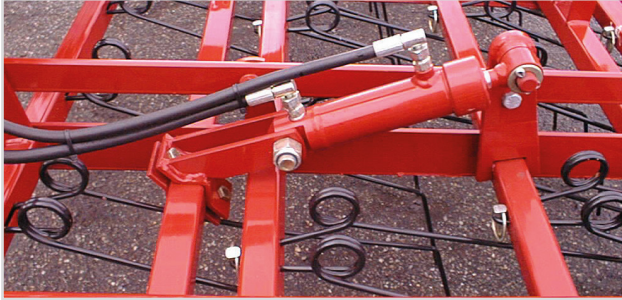

Hydraulically adjustable tine pressure.



Levelling bar.



Levelling plate.

Work Width, m	Description	Weight, kg	Item Number
3.00 - 6.00 + 9.00	LED lights with wire and socket incl. holder - Rear mounted	-	4895100
7.50 + 12.00 - 15.00	LED lights with wire and socket incl. holder - Rear mounted	-	4895150
12.00 - 15.00	LED lights w/wire and socket for models with Multi-Seeder incl. holder - Rear mounted	-	4895200
3.00 - 7.50	LED marking lights incl. holder - Front mounted	-	4895050
3.00 - 7.50	LED marking lights and set of reflective warning boards incl. holder - Front mounted	-	4895425
3.00 - 7.50	Set of reflective warning boards incl. holder - Front mounted	-	4895400
3.00 - 15.00	Set of reflective warning boards incl. holder - Rear mounted	-	4895375
-	7 x 450 mm double tines, when replacing 7 x 600 mm tines. Order by number of sections	-	4899015
-	9 x 450 mm double tines, when replacing 9 x 600 mm tines. Order by number of sections	-	4899016
3.00	Hydraulically adjustable tine pressure	<sup>1*</sup> 20	4890900
4.50	Hydraulically adjustable tine pressure	<sup>1*</sup> 30	4890950
6.00	Hydraulically adjustable tine pressure	<sup>1*</sup> 40	4891000
7.50	Hydraulically adjustable tine pressure	<sup>1*</sup> 50	4891050
9.00	Hydraulically adjustable tine pressure	<sup>1*</sup> 60	4891100
12.00	Hydraulically adjustable tine pressure	<sup>1*</sup> 80	4891150
15.00	Hydraulically adjustable tine pressure	<sup>1*</sup> 100	4891200
3.00	Levelling bar for levelling of molehills, cow pats etc. ( <b>Only factory-mounted</b> )	-	4896025
6.00	Levelling bar for levelling of molehills, cow pats etc. ( <b>Only factory-mounted</b> )	-	4896000
7.50	Levelling bar for levelling of molehills, cow pats etc. ( <b>Only factory-mounted</b> )	-	4896050
9.00	Levelling bar for levelling of molehills, cow pats etc. ( <b>Only factory-mounted</b> )	-	4896100
-	Levelling plate (600 mm tines) suitable for molehills and livestock manure (Per section)	11	4899002
-	Levelling plate (450 mm tines) suitable for molehills and livestock manure (Per section)	11	4899003
6.00	Extra wheel set, 2 pcs. 16x6.5x8 – 6 PLY	<sup>2*</sup> 40	4893000
12.00	Extra wheel set, 2 pcs. 18.5 x 8.5 x 8 - 6 PLY	60	4893050
-	18.5x8.5x8–6 PLY instead of 16x6.5x8–6 PLY (Additional price per set)	50	4893100
-	Rear mounted wheel set - 18.5x8.5x8–6 PLY	210	4892800
-	Mounting set for Universal-Spreader, incl. mounting on new Weeder. Prices and info on Universal-Spreader	-	4894070
3.00 - 7.50	Front mounting of Weeder models. Double three-point linkage for front and rear mounting (Additional price)	-	4894200
-	Expansion kit - 2 x 25 cm	-	4894370
-	Fixation brackets (Per section)	-	4894300

<sup>1\*</sup>The equipment requires 1 additional double-acting oil outlet.

<sup>2\*</sup>When retrofitting levelling bar on 6.00 m model, the wheel set w/item number 4893050 must be ordered.

### MOUNTING SET FOR MULTI-SEEDER INCL. STEPS INCL. MOUNTING ON NEW WEEDEE - MAX. 300 KG LOAD IN FINE SEED HOPPER. PRICES AND INFO ON MULTI-SEEDER

Work Width, m	Description	Weight, kg	Item Number
3.00	Mounting set for Multi-Seeder	45	4894060
4.50	Mounting set for Multi-Seeder	45	4894061
6.00	Mounting set for Multi-Seeder	45	4894062
7.50	Mounting set for Multi-Seeder	45	4894065
9.00	Mounting set for Multi-Seeder	95	4894066
9.00 LOW - 12.00	Mounting set for Multi-Seeder	120	4894067
15.00	Mounting set for Multi-Seeder	120	4894068
-	Hydraulic lifting of seed wheel on Multi-Seeder	<sup>1*</sup> -	4893200

<sup>1\*</sup>The equipment requires 1 additional double-acting oil outlet.