



FRONT-PAKKER

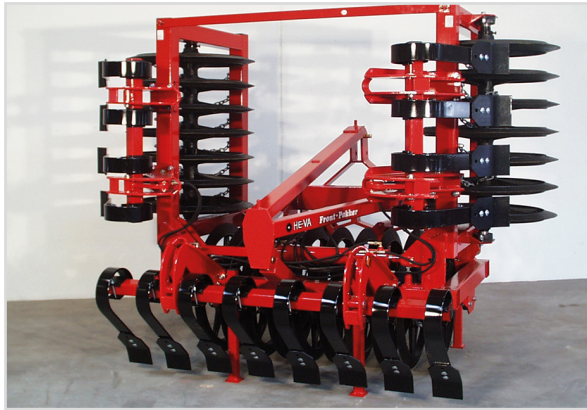

4.00 m with 800 mm rings,
hydraulic folding and Spring-Board.

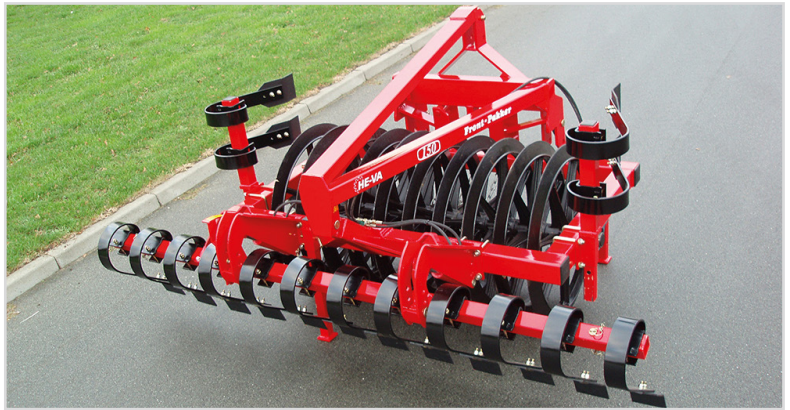

1.50 m with 4.00 m Spring-Board
in transport position.

- Specially developed ring profile w/shoulders ensures uniform packing on varying soil types.
- Autonomous packer. The pull centre is situated in front of the rings - to ensure free mobility of the machine.
- Automatic centre position when the implement is lifted on the headland.
- Three-point linkage with category 2 pins and category 2 distance.

MACHINES

Work Width, m	Type	Ring Type	No. of Rings	Transport Width, m	Power Req., HP	Weight, kg	Item Number
FRONT-PAKKER							
1.50	Rigid	700 mm	10	1.70	15	622	67033-70
1.50	Rigid	800 mm	10	1.75	15	782	67033-80
1.65	Rigid	900 mm	10	1.80	15	920	67043-90
2.60	Rigid	700 mm	16	2.60	20	867	67034-70
2.60	Rigid	800 mm	16	2.60	20	1,123	67034-80
2.60	Rigid	900 mm	14	2.60	20	1,443	67044-90
3.00	Rigid	700 mm	18	3.00	25	953	67035-70
3.00	Rigid	800 mm	18	3.00	25	1,241	67035-80
3.00	Rigid	900 mm	17	3.00	25	1,602	67045-90
3.00	Rigid	700/800/700 mm	18	3.00	25	1,113	67235-70
3.00	Rigid	800/900/800 mm	17	3.00	25	1,441	67235-80
3.50	Rigid	700 mm	22	3.50	30	1,079	67037-70
3.50	Rigid	800 mm	22	3.50	30	1,415	67037-80
3.50	Rigid	900 mm	19	3.50	30	1,835	67037-90
3.50	Rigid	700/800/700 mm	22	3.50	30	1,255	67238-70
3.50	Rigid	800/900/800 mm	19	3.50	30	1,635	67238-80
4.00	Rigid	700 mm	24	4.15	35	1,247	67036-70
4.00	Rigid	800 mm	24	4.15	35	1,631	67036-80
4.00	Rigid	900 mm	23	4.15	35	2,111	67046-90
4.00	Rigid	700/800/700 mm	24	4.15	35	1,607	67236-70
4.00	Rigid	800/900/800 mm	23	4.15	35	1,831	67236-80
4.00	Foldable	700 mm	^{1*} 24	2.55	35	1,370	67046-70
4.00	Foldable	800 mm	^{1*} 24	2.65	35	1,754	67046-80
4.00	Foldable	900 mm	^{1*} 21	2.75	35	2,234	67047-90
4.00	Foldable	700/800/700 mm	^{1*} 24	2.55	35	1,530	67246-70
4.00	Foldable	800/900/800 mm	^{1*} 21	2.65	35	1,954	67246-80
4.50	Foldable	700 mm	^{1*} 26	2.55	40	1,466	67051-70
4.50	Foldable	800 mm	^{1*} 26	2.65	40	1,882	67051-80
4.50	Foldable	900 mm	^{1*} 23	2.75	40	2,402	67051-90
4.50	Foldable	700/800/700 mm	^{1*} 26	2.55	40	1,626	67251-70
4.50	Foldable	800/900/800 mm	^{1*} 23	2.65	40	2,082	67251-80
5.00	Foldable	700 mm	^{1*} 30	2.85	45	1,814	67048-70
5.00	Foldable	800 mm	^{1*} 30	2.95	45	2,294	67048-80
5.00	Foldable	700/800/700 mm	^{1*} 30	2.85	45	2,006	67248-70
6.00	Foldable	700 mm	^{1*} 36	2.85	55	2,083	67047-70
6.00	Foldable	800 mm	^{1*} 36	2.95	55	2,659	67047-80
6.00	Foldable	700/800/700 mm	^{1*} 36	2.95	55	2,275	67247-70

^{1*}Requires 1 double-acting oil outlet

MACHINES (CONTINUED)

Work Width, m	Type	Ring Type	No. of Rings	Transport Width, m	Power Req., HP	Weight, kg	Item Number
FRONT-PAKKER TWIN							
1.50	Rigid	700-700 mm	15	1.70	15	975	67033-75
1.50	Rigid	800-800 mm	15	1.75	20	1,185	67033-85
1.65	Rigid	900-900 mm	13	1.80	20	1,590	67043-95
2.60	Rigid	700-700 mm	21	2.60	20	1,380	67034-75
2.60	Rigid	800-800 mm	21	2.60	25	1,740	67034-85
3.00	Rigid	700-700 mm	24	3.00	25	1,570	67035-75
3.00	Rigid	800-800 mm	24	3.00	30	2,010	67035-85
3.50	Rigid	700-700 mm	30	3.50	35	1,610	67039-75
3.50	Rigid	800-800 mm	30	3.50	40	2,290	67039-85
3.50	Foldable	700-700 mm	^{1*} 29	2.55	35	1,780	67049-75
3.50	Foldable	800-800 mm	^{1*} 29	2.65	40	2,460	67049-85
4.00	Rigid	700-700 mm	34	4.15	40	1,890	67036-75
4.00	Rigid	800-800 mm	34	4.15	45	2,665	67036-85
4.00	Foldable	700-700 mm	^{1*} 32	2.55	40	2,070	67046-75
4.00	Foldable	800-800 mm	^{1*} 32	2.65	45	2,845	67046-85

^{1*}Requires 1 double-acting oil outlet



1.50 m Front-Pakker Twin with Ø800 mm.

STANDARD EQUIPMENT

- Cleaning chains between the rings.
- Packer rings with wide shoulders – unique HE-VA feature.
- Support stand, pins and locking pins.



3.00 m with 800/900/800 mm rings.

EXTRA EQUIPMENT

- 2.60 m, 3.00 m, 3.50 and 4.00 m Front-Harrow or Spring-Board can also be mounted on 1.50/1.65 m models.
- Spring-Board is w/mech. adjustment of the height of the tine row and hydr. adjustment of the preparation degree.
- Transverse locking syst. w/possible individual connection and discon., very easy without use of any tools.
- Stabilization device: is recommended for combination with GPS auto steer.

Description	Weight, kg	Item Number
LED marking lights with clear and red glass, rigid models	4	67033-01
LED marking lights on mounting bar with clear and red glass, 4.00 m hydr. model	14	67033-02
LED marking lights on mounting bar with clear and red glass, 4.50 + 6.00 m hydr.	17	67033-03
Set of reflective warning boards (2 pieces)	6	690160075
Weight console set – for bolting on of additional weight, 2 pcs. (Front weight needs to be specified)	32	67086-00
Stabilization device for all models	16	67086-10
Mech. double change-over valve changes between Spring-Board and hydr. folding.	5	67086-15
Stone box set (2 pieces)	32	630555009
Double three-point linkage: hereby the Front-Roller can be mounted both front and rear on the tractor	-	63040-02

EXTRA EQUIPMENT (CONTINUED)

Work Width, m	Type	Description	Weight, kg	Item Number
2-ROW FRONT HARROW – 12 X 45 MM TINES				
2.60	Rigid	Front harrow with 15 tines, 2-row, with spindle depth control	192	67080-50
3.00	Rigid	Front harrow with 17 tines, 2-row, with spindle depth control	210	67081-50
3.50	Rigid	Front harrow with 20 tines, 2-row, with spindle depth control	233	67083-50
4.00	Rigid	Front harrow with 23 tines, 2-row, with spindle depth control	259	67082-50
4.00	Foldable	Front harrow with 23 tines, 2-row, with spindle depth control	376	67087-50
4.50	Foldable	Front harrow with 25 tines, 2-row, with spindle depth control	398	67051-50
5.00	Foldable	Front harrow with 29 tines, 2-row, with spindle depth control	423	67091-50
6.00	Foldable	Front harrow with 35 tines, 2-row, with spindle depth control	474	67089-50
-	-	Edge equipment set for front-harrow	17	67058-00
3-ROW FRONT HARROW – 12 X 65 MM TINES				
2.60	Rigid	Front harrow with 15 tines, 3-row, with spindle depth control	290	67080-51
3.00	Rigid	Front harrow with 17 tines, 3-row, with spindle depth control	309	67081-51
3.50	Rigid	Front harrow with 20 tines, 3-row, with spindle depth control	348	67083-51
4.00	Rigid	Front harrow with 23 tines, 3-row, with spindle depth control	387	67082-51
4.00	Foldable	Front harrow with 23 tines, 3-row, with spindle depth control	566	67087-51
4.50	Foldable	Front harrow with 25 tines, 3-row, with spindle depth control	579	67051-51
5.00	Foldable	Front harrow with 29 tines, 3-row, with spindle depth control	623	67091-51
6.00	Foldable	Front harrow with 35 tines, 3-row, with spindle depth control	696	67089-51
-	-	Edge equipment set for front-harrow	30	67058-10
-	-	Goose foot point 180x6 mm, only for 12x65 mm tines (Additional price per m)	4	3401016

Work Width, m	Type	Description	Weight, kg	Item Number
SPRING-BOARD – 10 X 80 MM TINES				
2.60	Rigid	Spring-Board with hydraulic depth control, 10 tines	^{1*} 194	67183-00
3.00	Rigid	Spring-Board with hydraulic depth control, 12 tines for mounting on 1.50/1.65 m	^{1/2*} 293	67194-00
3.00	Rigid	Spring-Board with hydraulic depth control, 12 tines	^{1*} 220	67184-00
3.50	Rigid	Spring-Board with hydraulic depth control, 14 tines	^{1*} 286	67191-00
4.00	Rigid	Spring-Board with hydraulic depth control, 16 tines for mounting on 1.50/1.65 m	^{1/2*} 279	67186-00
4.00	Rigid	Spring-Board with hydraulic depth control, 16 tines	^{1*} 279	67185-00
4.00	Foldable	Spring-Board with hydraulic depth control, 16 tines	^{1/3*} 373	67188-00
4.50	Foldable	Spring-Board with hydraulic depth control, 18 tines	^{1*} 412	67193-00
5.00	Foldable	Spring-Board with hydraulic depth control, 20 tines	^{1*} 429	67192-00
6.00	Foldable	Spring-Board with hydraulic depth control, 24 tines	^{1*} 476	67190-00
-	-	Edge equipment set for Spring-Board tines	5	63301-00
SPRING-BOARD WITH SLICING PLATES				
2.60	Rigid	Spring-Board with hydraulic depth control, 10 tines	^{1*} 195	67383-00
3.00	Rigid	Spring-Board with hydraulic depth control, 12 tines for mounting on 1.50/1.65 m	^{1/2*} 237	67394-00
3.00	Rigid	Spring-Board with hydraulic depth control, 12 tines	^{1*} 222	67384-00
3.50	Rigid	Spring-Board with hydraulic depth control, 14 tines	^{1*} 290	67391-00
4.00	Rigid	Spring-Board with hydraulic depth control, 16 tines for mounting on 1.50/1.65 m	^{1/2*} 295	67386-00
4.00	Rigid	Spring-Board with hydraulic depth control, 16 tines	^{1*} 261	67385-00
4.00	Foldable	Spring-Board with hydraulic depth control, 16 tines	^{1/3*} 378	67388-00
4.50	Foldable	Spring-Board with hydraulic depth control, 18 tines	^{1*} 416	67393-00
5.00	Foldable	Spring-Board with hydraulic depth control, 20 tines	^{1*} 434	67392-00
6.00	Foldable	Spring-Board with hydraulic depth control, 24 tines	^{1*} 482	67390-00
TRANSVERSE LOCKING SYSTEM - CONNECTS THE SPRING-BOARD TINES				
2.60	Rigid	Complete set for Spring-Board	28	67283-00
3.00	Rigid	Complete set for Spring-Board	48	67284-00
3.50	Rigid	Complete set for Spring-Board	57	67286-00
4.00	Rigid	Complete set for Spring-Board	46	67285-00
4.00	Foldable	Complete set for Spring-Board	46	67288-00
4.50	Foldable	Complete set for Spring-Board	53	67289-00
5.00	Foldable	Complete set for Spring-Board	57	67292-00
6.00	Foldable	Complete set for Spring-Board	66	67290-00



^{1*} Requires 1 additional double-acting oil outlet.

^{2*} Can manually be changed to transport width 1.85 and 2.85 m.

^{3*} Cannot be mounted on 1.50 / 1.65 m models.

PRESS-ROLLER



Press-Roller H760, 1.50 m.

- Large wheel diameter ensures proper operation on loose sandy soil.
- Three-point linkage with category 2 pins and category 2 distance.

Work Width, m	Type	No. of Wheels	Transport Width, m	Power Req., HP	Weight, kg	Item Number
1.50	Rigid	4	1.70	20	470	67072-00
4.00	Rigid	1+4+1	4.15	35	705	67073-00
4.00	Foldable	1* 1+4+1	2.65	35	795	67074-00

*Requires 1 double-acting oil outlet

STANDARD EQUIPMENT

- Triple-sealed ball bearings and 60 mm shaft.
- Rubber wheels, 10.0/75 x 15.3 – 10 PLY, 760 mm wheel diameter.
- Scrapers between and behind wheels.
- Support stand, pins and locking pins.

EXTRA EQUIPMENT

Description	Weight, kg	Item Number
LED marking lights with clear and red glass, rigid models	4	67033-01
LED marking lights with clear and red glass, 4.00m hydr. model	14	67033-02
LED marking lights with clear and red glass, 5.00 + 6.00m hydr.	17	67033-03
Set of reflective warning boards (2 pieces)	6	690160075
Weight console set – for bolting on of additional weight, 2 pcs. (Front weight needs to be specified)	32	67086-00
Stabilization device for all models	16	67086-10